

MODEL RANGE

240




fig. 1.1 hard top




fig 1.2 pick up




fig. 1.3 open top

250




fig. 2.1 hard top




fig. 2.2 pick up




fig. 2.3 open top




fig 2.4 chassis cab

300




fig. 3.1 hard top




fig. 3.2 pick up




fig. 3.3 open top




fig. 3.4 chassis cab




fig. 3.5 crew cab hard top




fig. 3.6 crew cab pick up




fig. 3.7 crew cab open top




fig. 3.8 chassis crew cab

330




fig. 4.1 chassis cab




fig. 4.2 chassis crew cab




fig. 4.3 6x6 chassis cab




fig. 4.4 6x6 chassis crew cab

360




fig. 5.1 chassis cab




fig. 5.2 chassis crew cab




fig. 5.3 6x6 chassis cab





fig. 5.4 6x6 chassis crew cab

IBEX F8 DIMENSIONS


		240	250	300	330	360
Overall length		3320	3425	4075	4920 (4x4)	5295 (4x4)
					5920 (6x6)	6295 (6x6)
Overall width		1850	1850	1850	1850	1850
Overall height	*	1990	1990	1990	1990	1990
Wheelbase		2410	2515	3165	3300	3675
Rear axle spread					1000	1000
Rear platform length			975 (2.4)	1625 (3.4)	2470 (4.1)	2845 (5.1)
				955 (3.8)	1800 (4.2)	2175 (5.2)
					3470 (4.3)	3845 (5.3)
					2605 (4.4)	3175 (5.4)
Cargo bed length			1130	1780 (3.4)	2625 (4.1)	3000 (5.1)
				1110 (3.8)	1955 (4.2)	2330 (5.2)
					3625 (4.3)	4000 (5.3)
					2955 (4.4)	3330 (5.4)
Cargo bed height	*		965	965	1015	1015
Internal cargo area length		1135	1240	1135 (crew cab)		
				1890 (single cab)		
Internal cargo area width		1520	1520	1520		
Internal cargo area height		1175	1175	1175		
Internal cargo area floor height	*	815	815	815		
Width between wheel boxes		1015	1015	1015		
Internal cabin width		1510	1510	1510	1510	1510
Approach angle	*	88	88	88	88	88
Ramp break-over angle	*	132	134	144	148.5	149
Departure angle	*	88	88	88	37	37
Axle ground clearance	*	260	260	260	260	260
Minimum underbody ground clearance	*	370	370	370	370	370
Ground clearance to sill	*	550	550	550	550	550

* dependent upon choice of tyre, suspension and options fitted. Unladen vehicle.
all dimensions in mm

IBEX F8 CLEARANCE ANGLES

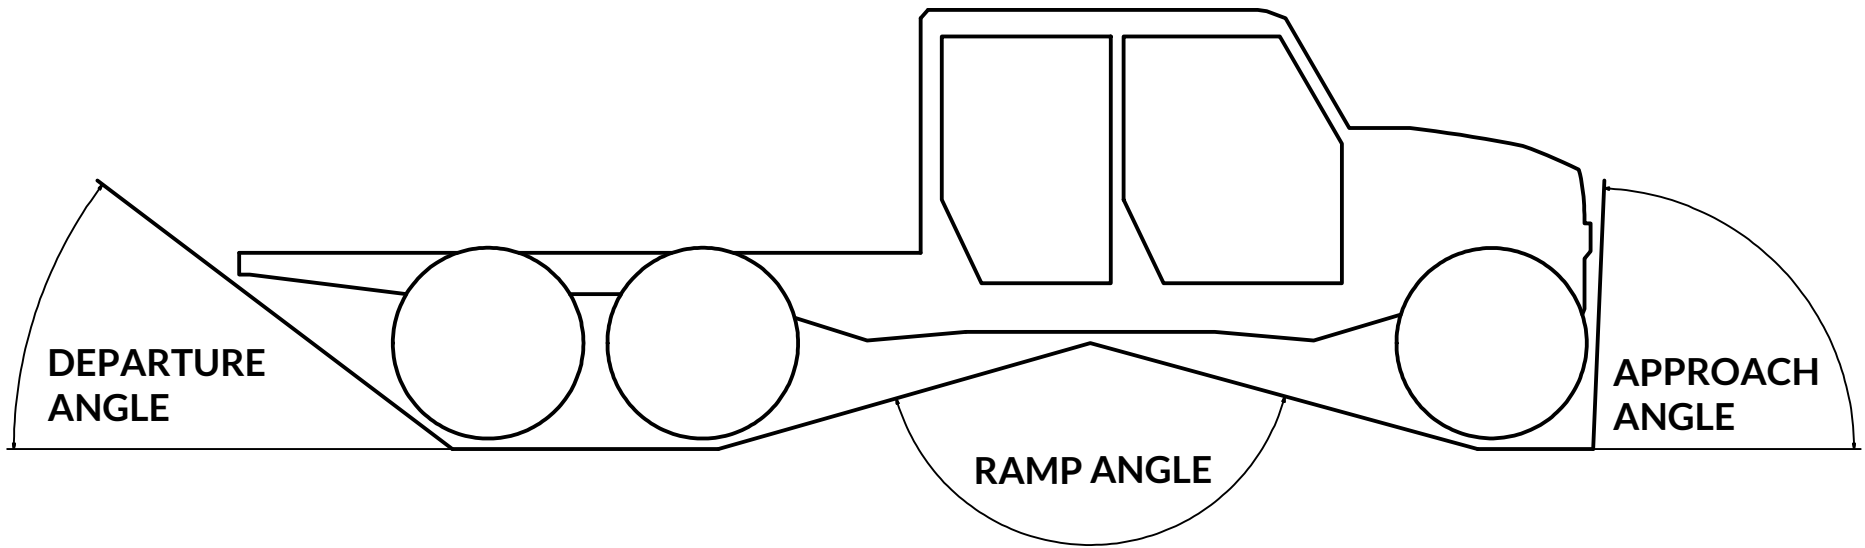

IBEX F8 SCHEMATIC-SIDE

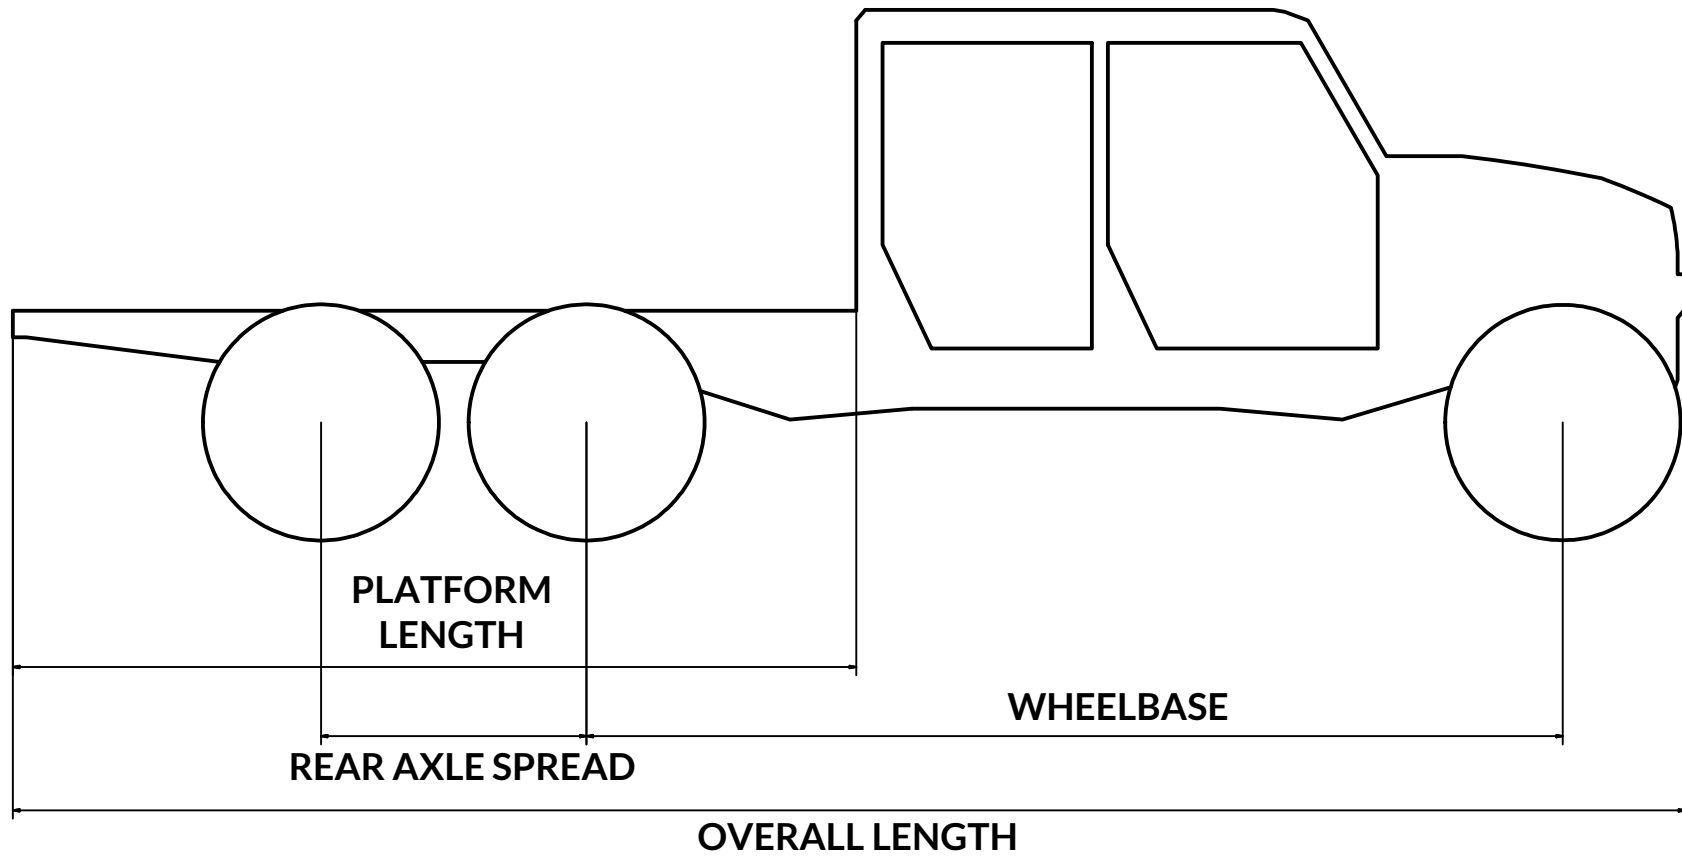

IBEX F8 SCHEMATIC-FRONT

